


FILM DATA SHEET

SV400

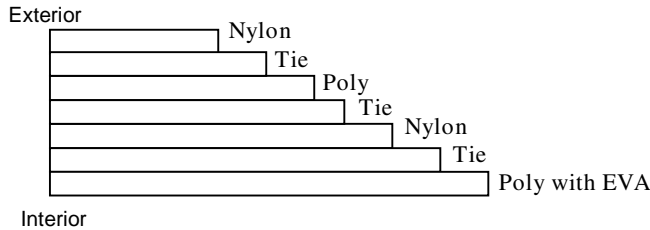

Physical Description:

Clear 4mil Nylon/Poly COEX vacuum barrier film

Application:

SV400 is a cost-effective FDA approved film used extensively for demanding vacuum applications found in a variety of industries. The clarity allows it to be used in retail, as well as, institutional duties. The films extensibility (ability to stretch) allows it to conform to unique product geometry. Low oxygen transfer rate, high impact resistance, and its low cost make it popular with meat, fish, nuts, dried fruit, jerky, and snack products.

Converting:

It can be converted in many ways: 2-seal pouch, 3-seal pouch, Stand-Up Pouch or a re-closeable zippered pouch (tamper-evident or open top). It can also be surface printed (flexo line or flexo process).

Physical Properties:

PROPERTIES	TEST METHOD	UNIT OF MEASURE	VALUE
Standard Thickness	D-2103	Mils	4.0
Yield	FPA B-11	Sq. Inch / lb	7,160
Oxygen Transmission	D-398 (@100F/90% rh)	cc / 100 sq. in. per day	4.25
Water Vapor Transmission	F-1249 (@73F/0%fh)	gram / 100 sq. in. per day	0.26
Haze	D-1003	percent	15.6
COF	D-1894	percent	0.10

The values indicated in this document are the results of tests made in compliance with the normal standards. They are given as an indication and should be considered as average values and given without any obligation on our part. This data was provided directly to us from our film supplier.