

## CorroLogic® Fogging Fluid VpCI®-339

### DESCRIPTION

CorroLogic® Fogging Fluid VpCI®-339 is a ready-to-use 100% Vapor phase Corrosion Inhibitor (VpCI®) product for preservation of void spaces comprised of multi-metals. Vapor phase Corrosion Inhibitors in CorroLogic® Fogging Fluid VpCI®-339 migrate to protect metal surfaces, even in hard-to-reach areas, resulting in time and cost savings. When appropriately applied, the product leaves no residue at the end of the preservation period and allows the equipment to be placed into service right away, often without the need for corrosion inhibitor removal.


### PACKAGING & STORAGE

CorroLogic® Fogging Fluid VpCI®-339 is available in 5 gallon (19 L) plastic pails, 55 gallon (208 L) metal drums, totes, and bulk.

To ensure best product performance, store in original packaging, indoors, and out of direct sunlight at 40-100 °F (4-38 °C).

Shelf life: 2 years

### VpCI® METALWORKING PRODUCTS

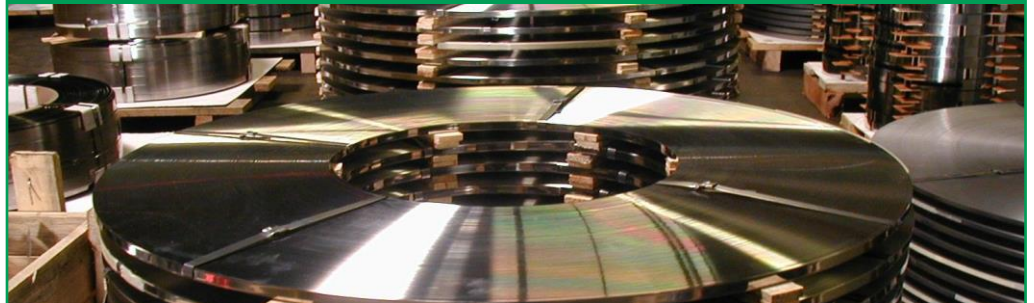

### FEATURES

- 100% Vapor phase Corrosion Inhibitor
- Does not leave solid residue
- Forms a thin, self-healing film
- Supplied ready-to-use
- Fast acting, convenient to apply
- Non-flammable
- pH neutral
- Low odor
- Soluble in water and hydrocarbons
- Multi-metal protection

### TYPICAL APPLICATIONS

- Void space protection
- Complex internal cavities
- Double wall spaces
- Pipes, heat exchangers, and modules
- Transportation and deep storage of key assets

### METALS PROTECTED

- Mild carbon steel
- Stainless steel
- Cast Iron
- Aluminum
- Copper
- Galvanized steel

# CorroLogic® Fogging Fluid VpCI®-339

## TYPICAL PROPERTIES

Appearance	Clear Yellow to Amber Liquid
Density	7.5-7.7 lb/gal
pH (1% aqueous)	6-7
Flash Point	217 °F (103 °C)
Freeze Point	-76 °F (-60 °C)

## APPLICATION

Fog or mist into void spaces, such as pipes, tanks, containers, boxes, crates, and shrouded packages at a rate of 0.15-0.2 oz/ft<sup>3</sup> (0.15-0.2 L/m<sup>3</sup>) of enclosed space. Always fog CorroLogic® Fogging Fluid VpCI®-339 uniformly within enclosure and allow direct access of vapors to metal surfaces to be protected. Enclose the space after application.

Please contact Cortec® Technical Service for specific dosing and equipment recommendations, and for application guidance.

### LIMITED WARRANTY

All statements, technical information and recommendations contained herein are based on tests Cortec® Corporation believes to be reliable, but the accuracy or completeness thereof is not guaranteed.

Cortec® Corporation warrants Cortec® products will be free from defects when shipped to customer. Cortec® Corporation's obligation under this warranty shall be limited to replacement of product that proves to be defective. To obtain replacement product under this warranty, the customer must notify Cortec® Corporation of the claimed defect within six months after shipment of product to customer. All freight charges for replacement products shall be paid by customer.

Cortec® Corporation shall have no liability for any injury, loss or damage arising out of the use of or the inability to use the products.

**BEFORE USING, USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR ITS INTENDED USE, AND USER ASSUMES ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.** No representation or recommendation not contained herein shall have any force or effect unless in a written document signed by an officer of Cortec® Corporation.

**THE FOREGOING WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, EXPRESS, IMPLIED OR STATUTORY, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTY OF MERCHANTABILITY OR OF FITNESS FOR A PARTICULAR PURPOSE. IN NO CASE SHALL CORTEC® CORPORATION BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES.**

Revised: 11/23/20. Supersedes: 04/06/20. ©Cortec Corporation 2002-2020 of Cortec® Corporation. All Rights Reserved. Copying and/or manipulation of these materials in any form without the written authorization of Cortec® Corporation is strictly prohibited. 2020, ©Cortec® Corp. ISO accreditation applies to Cortec's processes only.

DISTRIBUTED BY:

**TEXAS TECHNOLOGIES, INC.**

3600 W. Whitestone Blvd. Cedar Park, TX 78613

800.858.1379 or 512.267.0100

E-Mail: [info@texastechnologies.com](mailto:info@texastechnologies.com)

[www.texastechnologies.com](http://www.texastechnologies.com)